

0927 series diaphragm solenoid valve



0927-200



0927-300



0927-400



0955-305



0955-405




0955-505

Product features

- Suitable medium: water, gas, oil ($\leq 20\text{CST}$)
- Medium temp.: $-5^{\circ}\text{C} - 80^{\circ}\text{C}$
- Action type: pilot operated type
- Working pressure: normally closed: 0.3 ~ 16 bar
- Valve body material: brass (forged)
- Diaphragm sealing: material: NBR
- Coil Protection level: Plastic coil IP65

Internal structure & profile size figure

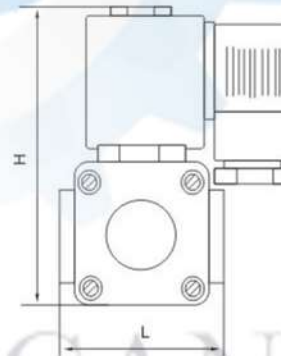

Technology data

| Model | Connecting Method | Diameter | Cv value | Length (mm) | Height (mm) | Medium temp. | Working pressure (pressure differential) | Rated voltage |
|----------|-------------------|----------|----------|-------------|-------------|--------------|--|--|
| 0927-200 | G 1/2" | 15 | 4.5 | 54 | 100 | -5~80°C | 0.3~16 bar | 220VAC/50HZ 110VAC/50HZ 15VA DC24 DC12 12W Tolerance: $\pm 10\%$ Other voltage can be customized |
| 0927-300 | G 3/4" | 20 | 14 | 80 | 118 | | | |
| 0927-400 | G 1" | 25 | 14 | 80 | 120 | | | |
| 0927-500 | G 1 1/4" | 32 | 14 | 115 | 127 | | | |
| 0927-600 | G1 1/2" | 40 | 24 | 124 | 130 | | | |
| 0927-700 | G2 | 50 | 30 | 150 | 150 | | | |
| 0955-305 | G 1/2" | 15 | 4.5 | 54 | 115 | | | |
| 0955-405 | G 3/4" | 20 | 14 | 80 | 130 | | | |
| 0955-505 | G 1" | 25 | 14 | 80 | 130 | | | |
| 0955-605 | G 1 1/4" | 32 | 14 | 115 | 132 | | | |
| 0955-705 | G1 1/2" | 40 | 24 | 124 | 132 | | | |
| 0955-805 | G2 | 50 | 30 | 150 | 152 | | | |