


ZCT (ZCQ) series stainless steel solenoid valve



Product features

- Suitable medium: steam, water, oil, weak acid and alkaline liquid etc.
- Medium temp.: -5°C- 150°C
- Action type: step by step direct acting type, direct acting type
- Working pressure: normally closed: 0 ~ 10 bar
normally open: 0 ~8 bar
- Valve body material: stainless steel
- Sealing material: Viton
- Coil protection level: Plastic coil Ip65, Iron clad coil IP54

Internal structure & profile size figure

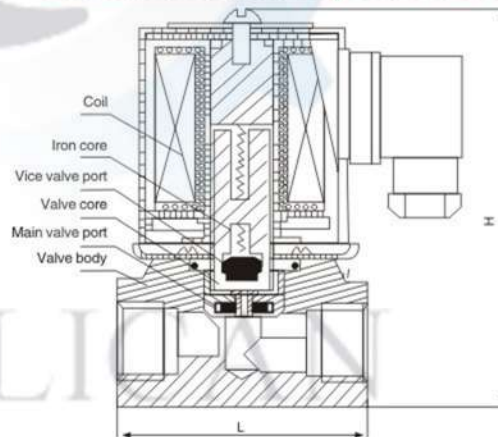

Technology data

Model	Connecting Method	Diameter	Cv value	Length (mm)	Height (mm)	Medium temp.	Working pressure (pressure differential)	Rated voltage
ZCT-6	G1/4", 1/2"	4.5	0.6	50	85	-5-150°C	Normally closed: 0-10 bar Normally open: 0-8 bar	220VAC/50HZ 110VAC/50HZ 22VA DC24 DC12 16W Tolerance: ± 10% Other voltage can be customized
ZCT-10	G3/8", 1/2"	10	1.5	68	100			
ZCT-15	G1/2"	10	1.5	68	100			
ZCT-20	G3/4"	15	3.5	78	110			
ZCT-25	G1"	15	3.5	78	110			
ZCT-10K	G3/8", 1/2"	10	1.5	68	120			
ZCT-15K	G1/2"	10	1.5	68	120			
ZCT-20K	G3/4"	15	3.5	78	125			
ZCT-25K	G1"	15	3.5	78	125			